

CAT 3508 Land Electric-Drive Drilling Module

<https://www.zeppelin.com/de-en/powersystems>

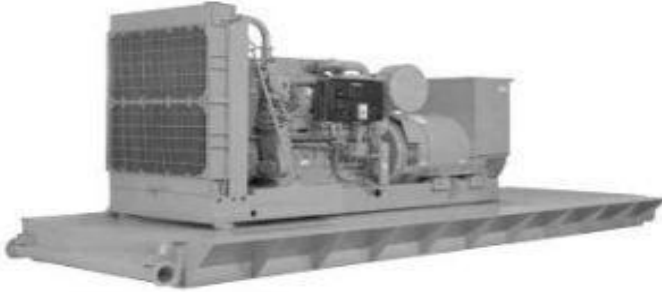


Image shown with optional attachments.

Minimum Rating	610 ekW
Maximum Rating	610 ekW
Emissions	Non-certified
Stroke	190 mm
Bore	170 mm
Fuel System	MUI
Displacement	34,5 l
Oil Change Interval	500 h
Engine Control and Protection	Woodward
Weight	15.352 kg
Voltage	600
Aspiration	Turbocharged-Aftercooled
Generator	SR4B
Length	7.874 mm
Width	2.385 mm
Height	2.779 mm
Lube Oil System - Refill	227 l
Cooling System - Engine	103 l
Maximum Rating	610 kVA
Maximum Power	610 kW
Rated Speed	1200 rpm

This offer is without obligation. The offer is based on our General Terms and Conditions of Sale and Delivery. Changes to equipment and accessories required for technical reasons may be made at any time. Subject to errors, changes and intermediate sale. Statutory value-added tax shall be added to all price.