


CAT Cat® C4.4 ACERT™ Industrial Power Unit

<https://www.zeppelin.com/de-en/powersystems>

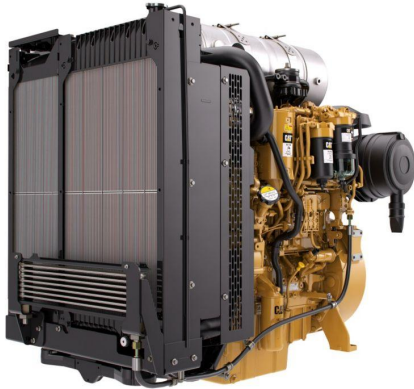

Maximum Power	129.4 kW
Maximum Torque	750.0 Nm @ 1600 rpm
Rated Speed	2200 rpm
Minimum Power	74.5 kW
Emissions	U.S. EPA Tier 4 Final
Engine Configuration	Inline 4, 4-Stroke-Cycle Diesel
Bore	105.0 mm
Stroke	127.0 mm
Displacement	4.4 l
Compression Ratio	16.0:2
Aspiration	Turbocharged Aftercooled (TA) or Twin Turbocharged Aftercooled (TTA)
Rotation from Flywheel End	Counterclockwise
Aftertreatment	DOC+DPF+SCR
Length	1433.0 mm
Width	820.0 mm
Height	1150.0 mm
Weight	700.0 kg
Width	695.0 mm
Height	430.0 mm
Diameter	270.0 mm
Weight	80.0 kg
Maximum Rating	129.4 kVA
Minimum Rating	74.5 kVA

This offer is without obligation. The offer is based on our General Terms and Conditions of Sale and Delivery. Changes to equipment and accessories required for technical reasons may be made at any time. Subject to errors, changes and intermediate sale. Statutory value-added tax shall be added to all price.